


150W LED High Bay Light



SPECIFICATION

> Light Source:	Philips Lumileds / Cree / LG / OSRAM
> Voltage:	90-264VAC, 50/60Hz
> LED Power:	150W
> System Power :	165W
> Luminous Flux:	14000lm
> Beam Angle(°):	80/100 /120
> Color Temp.:	3000K-7000K
> CRI:	>70
> Lamp Life(hrs):	50000
> Operating Temp.(°C):	-40 to +45
> Dimension:	Φ390 x 650mm
> Weight(kg):	~ 6.5kg
> IP-protection:	IP40 / IP65
> Certificate :	CE / ETL
> Material :	Aluminium Body
> Color :	White

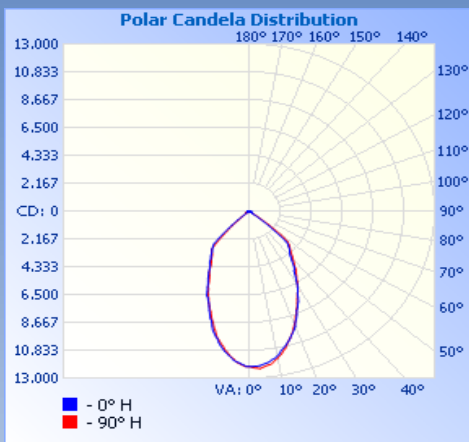

Illuminance at a Distance

Distance (ft)	Center Beam LUX	Beam Width	
10.0ft	1,301.3 LUX	11.7 ft	11.5 ft
20.0ft	325.3 LUX	23.3 ft	23.1 ft
30.0ft	144.6 LUX	35.0 ft	34.6 ft
40.0ft	81.3 LUX	46.7 ft	46.1 ft
50.0ft	52.1 LUX	58.3 ft	57.7 ft

■ Vert. Spread: 60.5° ■ Horiz. Spread: 59.9°

highbay-150W-100deg-P

Product Feature

- *Unique patented thermal management design to ensure low LED junction temperature.
- *Extremely light weight for safety use and installation.
- *Ultra high power to give ultra high brightness.
- *Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.
- *Energy savings, no UV and IR radiations, emits low heat.
- *Materials Patented fin aluminium heatsink structure.
- *High quality aluminium processing technique;

Application

Warehouse, production and logistics workshop, retail stores, theme restaurants, amusement parks, indoor stadiums and public places. Other industrial and commercial lighting purpose

Other Information

Special surface treatment process; High brightness LED light source, high efficiency and long life power supply.

