


## 400W LED Flood Light



### SPECIFICATION

Light Source:	Philips Lumileds / Cree / LG / OSRAM
Voltage:	90-305VAC, 50/60Hz
LED Power:	400W
System Power :	440W
Luminous Flux:	40000lm
Beam Angle(°):	30x30 / 85x135
Color Temp.:	3000K-7000K
CRI:	>70
Lamp Life(hrs):	50000
Operating Temp.(°C):	-40 to +45
Dimension:	606x511x117mm
Weight(kg):	~ 15.5
IP-protection:	IP65
Certificate :	CE / ETL
Material :	Aluminium Body
Color :	Black

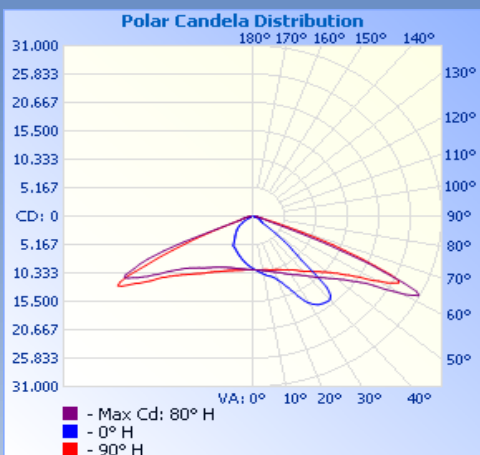

**Illuminance at a Distance**

Distance (ft)	Center Beam LUX	Beam Width	
10.0ft	1,041.1 LUX	14.6 ft	6.5 ft
20.0ft	260.3 LUX	29.3 ft	13.1 ft
30.0ft	115.7 LUX	43.9 ft	19.6 ft
40.0ft	65.1 LUX	58.6 ft	26.2 ft
50.0ft	41.6 LUX	73.2 ft	32.7 ft

■ Vert. Spread: 72.4° ■ Horiz. Spread: 36.3°

Beam angle : 85x136

### Product Feature

- \*Unique patented thermal management design to ensure low LED junction temperature.
- \*Extremely light weight for safety use and installation.
- \*Ultra high power to give ultra high brightness.
- \*Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.
- \*Energy savings, no UV and IR radiations, emits low heat.
- \*Materials Patented fin aluminium heatsink structure.
- \*High quality aluminium processing technique;

### Application

Warehouse, production and logistics workshop, retail stores, theme restaurants, amusement parks, indoor stadiums and public places. Other industrial and commercial lighting purpose

### Other Information

Special surface treatment process; High brightness LED light source, high efficiency and long life power supply.

