


## 200W LED Flood Light



### SPECIFICATION

<b>Light Source:</b>	Philips Lumileds / Cree / LG / OSRAM
<b>Voltage:</b>	90-305VAC, 50/60Hz
<b>LED Power:</b>	200W
<b>System Power :</b>	220W
<b>Luminous Flux:</b>	20000lm
<b>Beam Angle(°):</b>	30x30 / 85x135
<b>Color Temp.:</b>	3000K-7000K
<b>CRI:</b>	>70
<b>Lamp Life(hrs):</b>	50000
<b>Operating Temp.(°C):</b>	-40 to +45
<b>Dimension:</b>	507x366x91mm
<b>Weight(kg):</b>	~ 7.5
<b>IP-protection:</b>	IP65
<b>Certificate :</b>	CE / ETL
<b>Material :</b>	Aluminium Body
<b>Color :</b>	Black

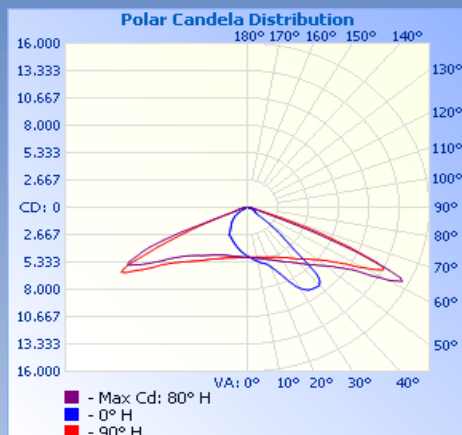

**Illuminance at a Distance**

Distance	Center Beam LUX	Beam Width
10.0ft	520.6 LUX	14.6 ft 6.5 ft
20.0ft	130.1 LUX	29.3 ft 13.1 ft
30.0ft	57.8 LUX	43.9 ft 19.6 ft
40.0ft	32.5 LUX	58.6 ft 26.2 ft
50.0ft	20.8 LUX	73.2 ft 32.7 ft

■ Vert. Spread: 72.4° ■ Horiz. Spread: 36.3°

Beam angle : 85 x 135

### Product Feature

- \*Unique patented thermal management design to ensure low LED junction temperature.
- \*Extremely light weight for safety use and installation.
- \*Ultra high power to give ultra high brightness.
- \*Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.
- \*Energy savings, no UV and IR radiations, emits low heat.
- \*Materials Patented fin aluminium heatsink structure.
- \*High quality aluminium processing technique;

### Application

Warehouse, production and logistics workshop, retail stores, theme restaurants, amusement parks, indoor stadiums and public places. Other industrial and commercial lighting purpose

### Other Information

Special surface treatment process; High brightness LED light source, high efficiency and long life power supply.

