


## 250W LED High Bay Light



### SPECIFICATION

> Light Source:	Philips Lumileds / Cree / LG / OSRAM
> Voltage:	90-264VAC, 50/60Hz
> LED Power:	250W
> System Power :	280W
> Luminous Flux:	24000lm
> Beam Angle(°):	80/100 /120
> Color Temp.:	3000K-7000K
> CRI:	>70
> Lamp Life(hrs):	50000
> Operating Temp.(°C):	-40 to +45
> Dimension:	Φ500 x 582mm
> Weight(kg):	~ 9kg
> IP-protection:	IP40 / IP65
> Certificate :	CE / ETL
> Material :	Aluminium Body
> Color :	White

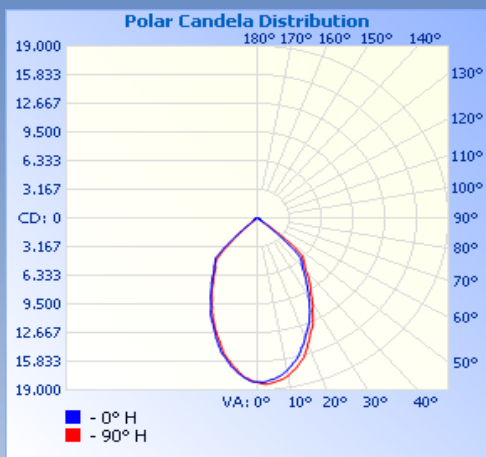

**Illuminance at a Distance**

Distance (ft)	Center Beam LUX	Beam Width (ft)
10.0ft	1,949.4 LUX	12.3 ft x 12.5 ft
20.0ft	487.3 LUX	24.6 ft x 25.1 ft
30.0ft	216.6 LUX	36.9 ft x 37.6 ft
40.0ft	121.8 LUX	49.2 ft x 50.2 ft
50.0ft	78.0 LUX	61.5 ft x 62.7 ft

■ Vert. Spread: 63.2°   ■ Horiz. Spread: 64.2°

highbay-250W-100deg-P

### Product Feature

- \*Unique patented thermal management design to ensure low LED junction temperature.
- \*Extremely light weight for safety use and installation.
- \*Ultra high power to give ultra high brightness.
- \*Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.
- \*Energy savings, no UV and IR radiations, emits low heat.
- \*Materials Patented fin aluminium heatsink structure.
- \*High quality aluminium processing technique;

### Application

Warehouse, production and logistics workshop, retail stores, theme restaurants, amusement parks, indoor stadiums and public places. Other industrial and commercial lighting purpose

### Other Information

Special surface treatment process; High brightness LED light source, high efficiency and long life power supply.

