


High Power LED Flood Light



SPECIFICATION	
> Voltage:	85-277VAC
> LED Power:	160W
> Power Efficiency :	>0.9
Power Factor :	>0.98
Light Efficiency :	>90%
> LED Lumens:	120LM/W
> Beam Angle(°):	30/50/60 /150
> Color Temp.:	2700K-7000K
> CRI:	>75
> Lamp Life(hrs):	>50,000
> Operating Temp.(°C):	-40 to + 55
> Dimension:	588.5mm x 299mm X 127.5mm
> Weight(kg):	11 Kg
> IP-protection:	IP67
> Certificate :	CE, EMC LVD TUV, ROHS, UL & CSA
> Material :	Aluminium Body
> Color :	White

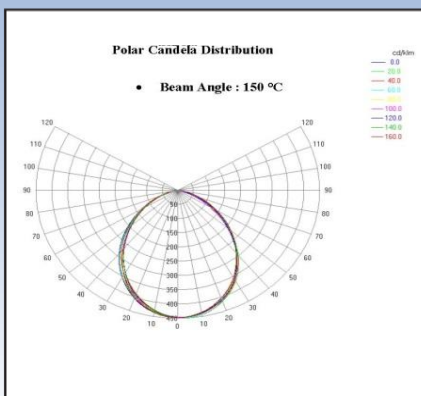

Product Feature

Including design. compactness. Optics .power .efficiency ,beam spread ,control. ease of installation . reliability and flexibility this makes it the optimum choice for today's high standard Flood light lighting with demand brilliant lighting levels as well as superior color temperature and rendering.

Luminaires and control gears minimize your lighting solutions 's total cost of ownership. Start enjoying significant saving and benefit from by replace your conventional light .

Housing :-

Compact design with high precision engineering tighter construction that virtually eliminates ingress of dust and Water

A modern design preserving the aesthetic look .

Incorporates the heat sink directly into the unit ensuring maximum heat transfer and long LED life.

Applications :-

Athletic facilities , churches , courtyards ,display window,, advertisement billboard, packing lot ,building facades , Swimming hall .Shopping Malls, Parks, Billboard , Squares , Roads, Petrol Station

