


80W LED High Bay Light



SPECIFICATION

> Light Source:	Philips Lumileds / Cree / LG / OSRAM
> Voltage:	90-264VAC, 50/60Hz
> LED Power:	80W
> System Power :	90W
> Luminous Flux:	7600lm
> Beam Angle(°):	80/100 /120
> Color Temp.:	3000K-7000K
> CRI:	>70
> Lamp Life(hrs):	50000
> Operating Temp.(°C):	-40 to +45
> Dimension:	Φ390 x 650mm
> Weight(kg):	- 6.5kg
> IP-protection:	IP40 / IP65
> Certificate :	CE
> Material :	Aluminium Body
> Color :	White

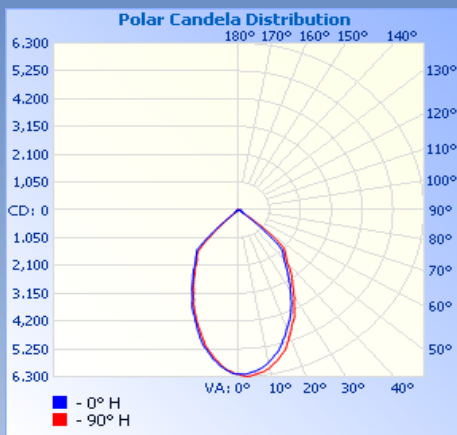

Illuminance at a Distance

Distance	Center Beam LUX	Beam Width	
10.0ft	667.4 LUX	12.3 ft	12.5 ft
20.0ft	166.8 LUX	24.6 ft	25.1 ft
30.0ft	74.2 LUX	36.9 ft	37.6 ft
40.0ft	41.7 LUX	49.2 ft	50.2 ft
50.0ft	26.7 LUX	61.5 ft	62.7 ft

■ Vert. Spread: 63.2° ■ Horiz. Spread: 64.2°

highbay-80W-100deg-P

Product Feature

- *Unique patented thermal management design to ensure low LED junction temperature.
- *Extremely light weight for safety use and installation.
- *Ultra high power to give ultra high brightness.
- *Easy installation and maintenance, dust prevention, longer lifetime with high lumen maintenance.
- *Energy savings, no UV and IR radiations, emits low heat.
- *Materials Patented fin aluminium heatsink structure.
- *High quality aluminium processing technique;

Application

Warehouse, production and logistics workshop, retail stores, theme restaurants, amusement parks, indoor stadiums and public places. Other industrial and commercial lighting purpose

Other Information

Special surface treatment process; High brightness LED light source, high efficiency and long life power supply.

